


SERAPID

ENGINEERED BOLSTER EXTENSIONS



SERAPID

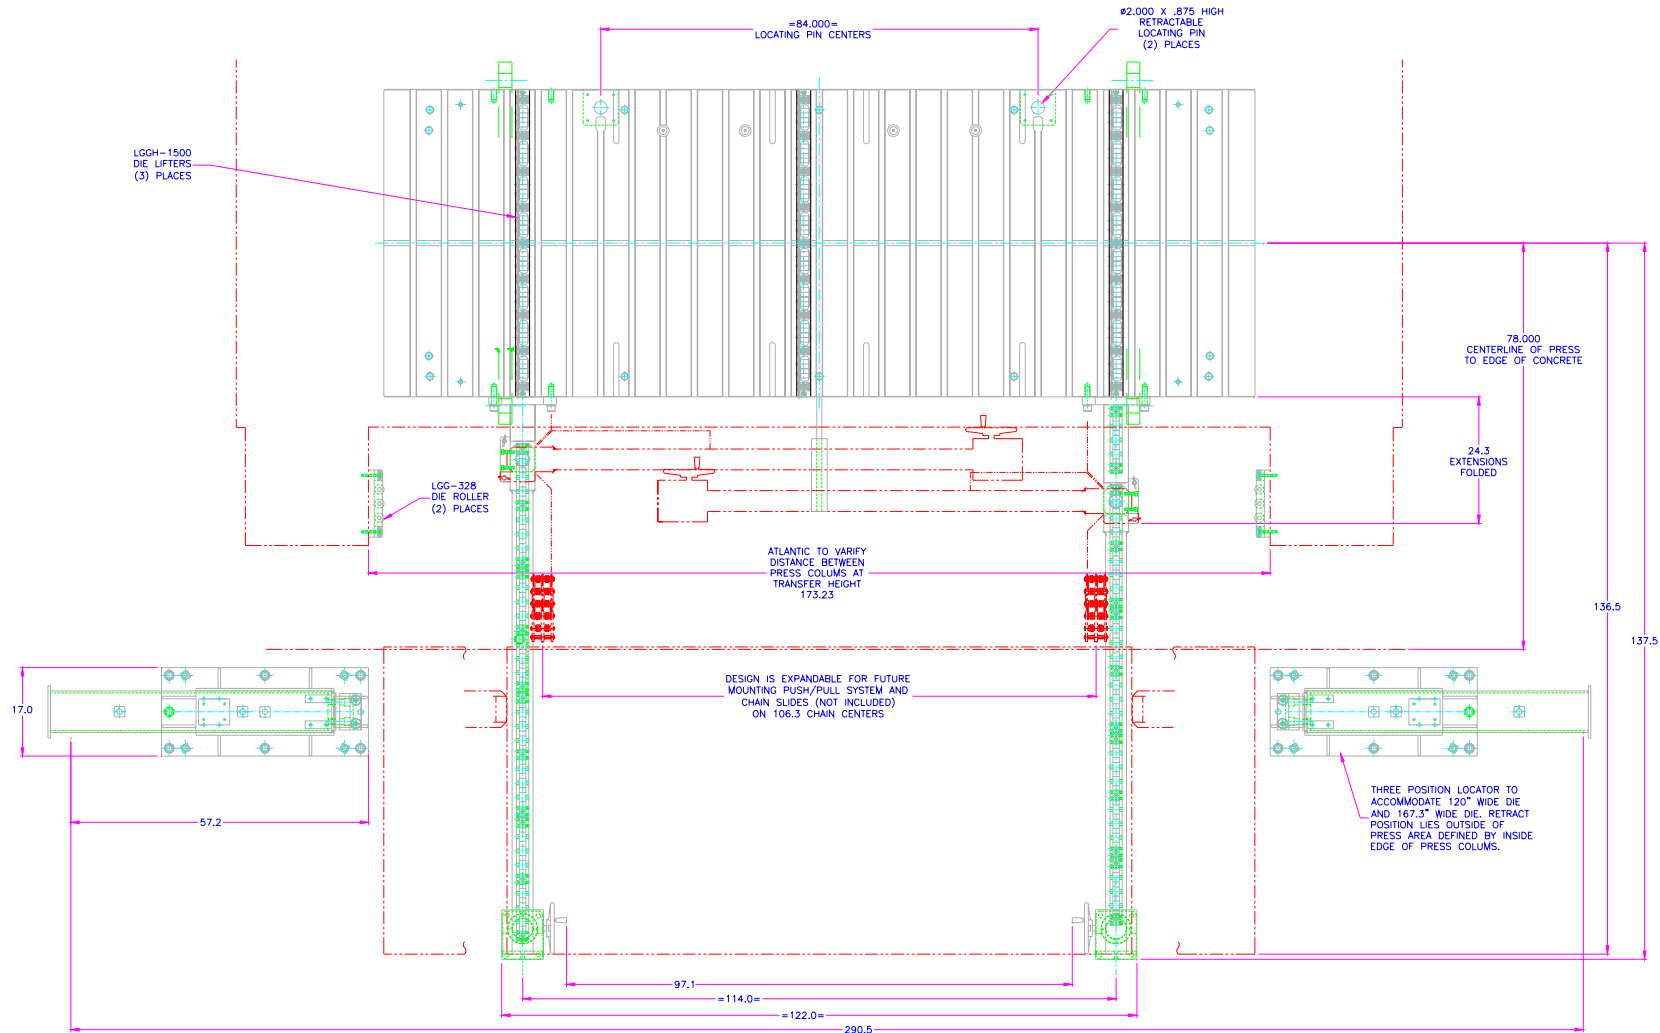

Application Information

- Die exchange times: 10 – 20 min.
- Die Weight: 50,000 lbs. max.
- Bolster Dimensions: 59 in. (F-B) x 146 in. (L-R)
 - Common sub-plate used

System Information

- Engineered Bolster Extensions w/ support legs
- BTSB, Rod Clamps for upper die shoe
- LGGH, Heavy-duty hydraulic roller bars
- LP125-12, Hydraulic Power Unit